



ESE 2021


PRELIMINARY EXAMINATION



MECHANICAL ENGINEERING

ESE TOPICWISE OBJECTIVE SOLVED PAPER-I

ESE 2021 TOPICWISE OBJECTIVE SOLVED PAPER - I
MECHANICAL ENGINEERING

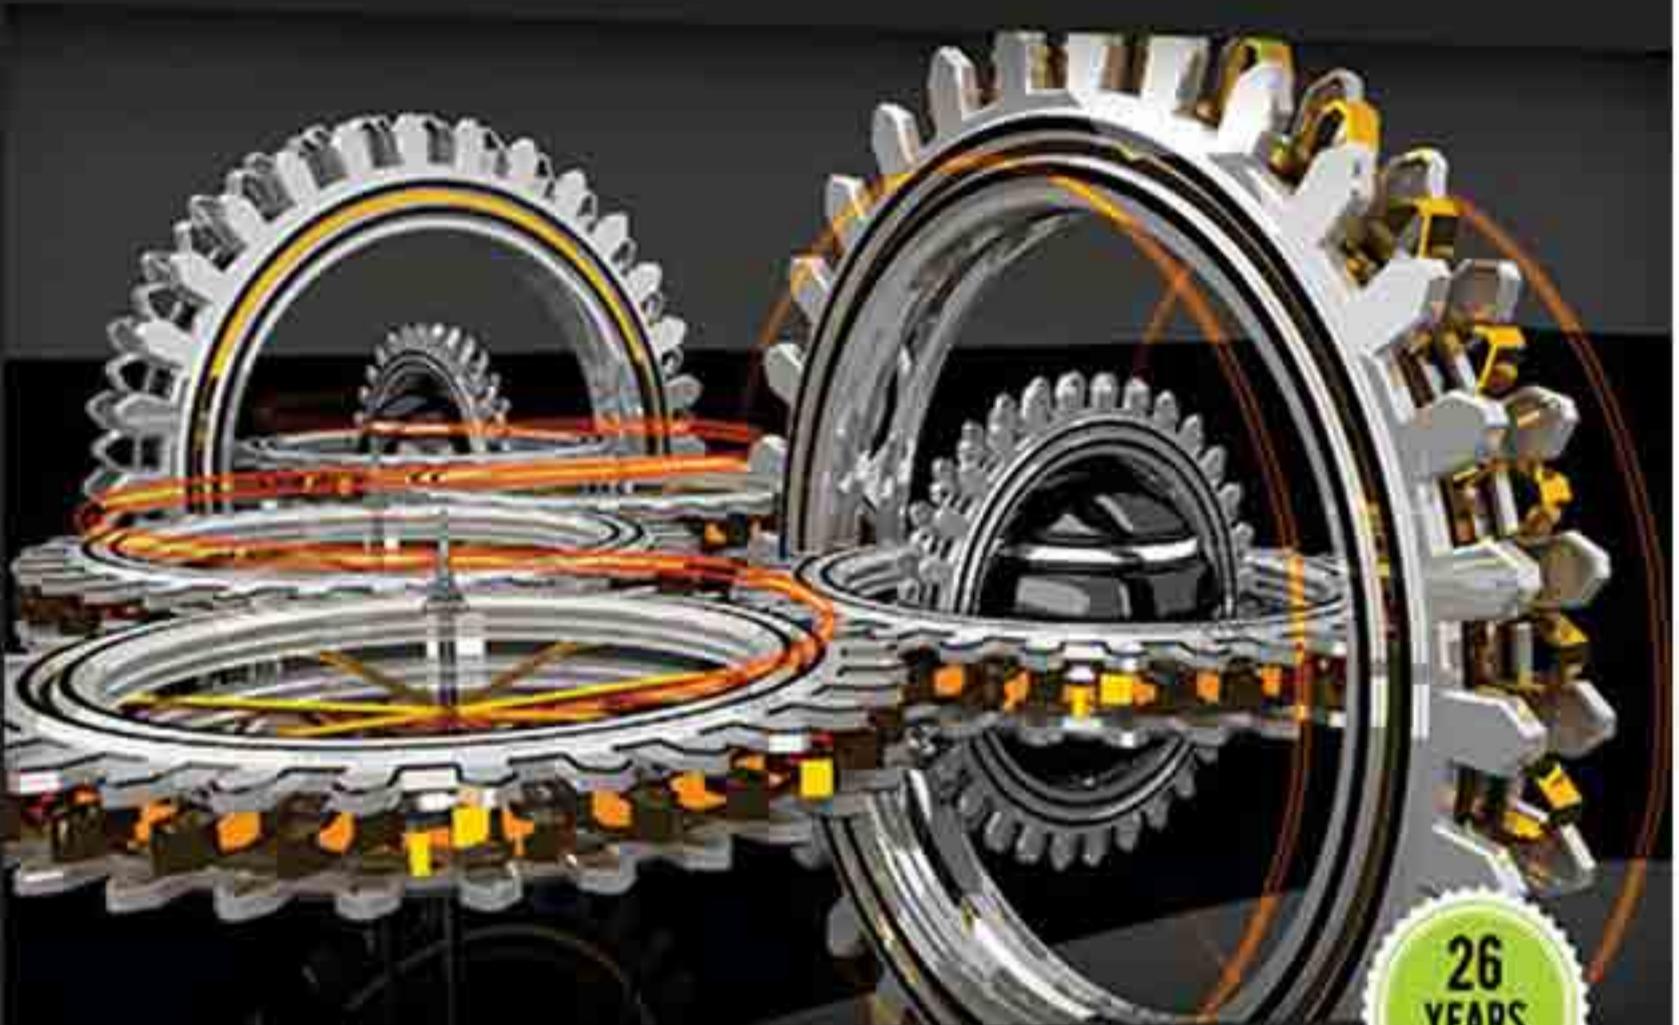

- Fully Revised & Updated
- Topicwise Description
- Detailed Solution



UPSC Engineering Service Examination 2021

MECHANICAL ENGINEERING
ESE TOPICWISE OBJECTIVE SOLVED
PAPER-I

1995-2020



Office: F-126, (Lower Basement), Katwaria Sarai, New Delhi-110 016

Phone: 011-26522064 ■ **Mobile:** 8130909220, 9711853908

Email: info.publications@iesmaster.org, info@iesmaster.org

Web: iesmasterpublications.com, iesmaster.org



IES MASTER PUBLICATION

F-126, (Lower Basement), Katwaria Sarai, New Delhi-110016

Phone : 011-26522064, **Mobile** : 8130909220, 9711853908

E-mail : info.publications@iesmaster.org

Web : www.iesmasterpublications.com

*© No part of this booklet may be reproduced or distributed in any form or by any means, electronic, mechanical, photocopying or otherwise or stored in a database or retrieval system without the prior permission of **IES MASTER Publication, New Delhi**. Violaters are liable to be legally prosecuted.*

First Edition : 2017

Second Edition : 2018

Third Edition : 2019

Fourth Edition : 2020

PREFACE


Engineering Services Examination (ESE) is the gateway to an immensely satisfying job in the engineering sector of India that offers multi-faceted exposure. The exposure to challenges and opportunities of leading the diverse field of engineering has been the main reason behind engineering students opting for Engineering Services as compared to other career options. To facilitate selection into these services, availability of numerical solution to previous years' paper is the need of the day.

It is an immense pleasure to present previous years' topic-wise objective solved papers of ESE. The revised and updated edition of this book is an outcome of regular and detailed interaction with the students preparing for ESE every year. The book includes solutions along with detailed explanation to all the questions. The prime objective of bringing out this book is to provide explanation to each and every question in such a manner that just by going through the solutions, ESE aspirants will be able to understand the basic concepts, and have the capability to apply these concepts in solving other questions that might be asked in future exams. Towards this end, this book becomes indispensable for every ESE aspiring candidate.

IES Master Publication
New Delhi

CONTENT

| | |
|--|------------------|
| 1. Thermodynamics | 01 – 127 |
| 2. Power Plant Engineering | 128 – 280 |
| 3. Fluid Mechanics and Machinery | 281 – 523 |
| 4. Heat and Mass Transfer | 524 – 631 |
| 5. Refrigeration and Air Conditioning | 632 – 726 |
| 6. IC Engine | 727 – 797 |
| 7. Renewable Sources of Energy | 798 – 803 |

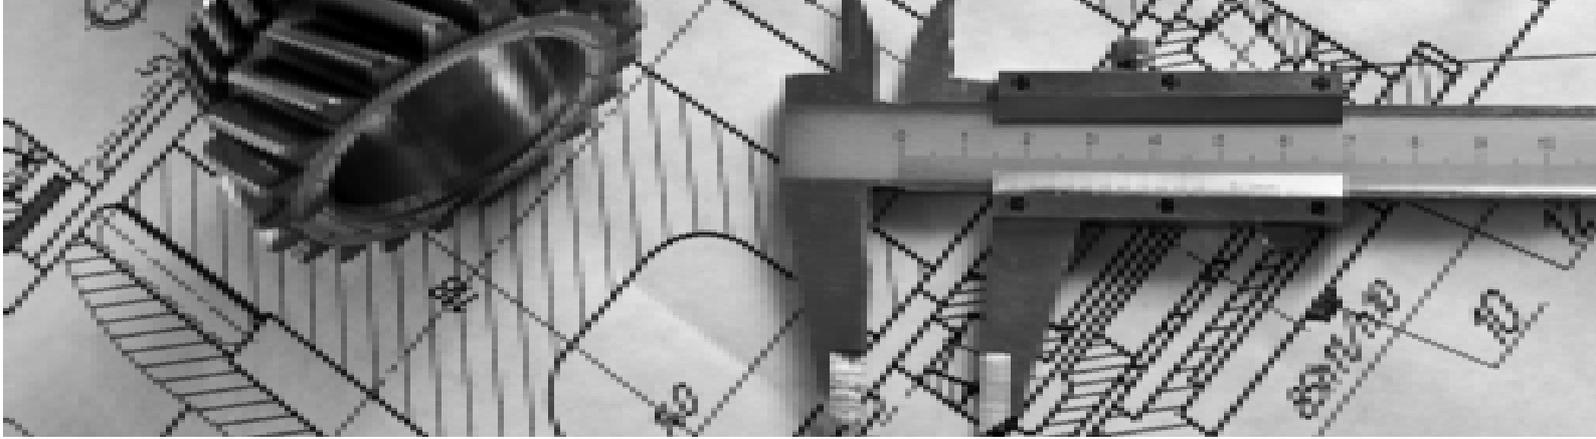

UNIT-1

Thermodynamics

SYLLABUS

Thermodynamic systems and processes; properties of pure substances; Zeroth, First and Second Laws of Thermodynamics; Entropy; Irreversibility and availability; analysis of thermodynamic cycles related to energy conversion : Rankine, Otto, Diesel and Dual Cycles; ideal and real gases; compressibility factor; Gas mixtures.

CONTENTS

| Chapter No. | Topic | Page No. |
|-------------|------------------------------------|-----------|
| 1. | Introduction and First Law | 02 – 37 |
| 2. | Second Law of Thermodynamics | 38 – 59 |
| 3. | Entropy and Exergy Analysis | 60 – 79 |
| 4. | Pure Substances | 80 – 91 |
| 5. | Ideal and Real Gases | 92 – 100 |
| 6. | Thermodynamic Relations | 101 – 108 |
| 7. | Compressible Flow | 109 – 127 |

1

INTRODUCTION AND FIRST LAW

IES – 2020

1. A piston-cylinder device with air at an initial temperature of 30°C undergoes an expansion process for which pressure and volume are related as given below:

| | | | |
|---------------------|-----|------|------|
| p(kPa) | 100 | 37.9 | 14.4 |
| V (m ³) | 0.1 | 0.2 | 0.4 |

The work done by the system for $n = 1.4$ will be

- (a) 4.8 kJ (b) 6.8 kJ
(c) 8.4 kJ (d) 10.6 kJ

IES – 2019

2. A 2 kg of steam occupying 0.3 m³ at 15 bar is expanded according to the law $pv^{1.3} = \text{constant}$ to a pressure of 1.5 bar. The work done during the expansion will be
- (a) 602.9 kJ (b) 606.7 kJ
(c) 612.5 kJ (d) 618.3 kJ
3. Certain quantities cannot be located on the graph by a point but are given by the area under the curve corresponding to the process. These quantities in concepts of thermodynamics are called as
- (a) cyclic functions (b) point functions
(c) path functions (d) real functions

IES – 2018

4. Which one of the following substances has constant specific heat at all pressures and temperature ?
- (a) Mono-atomic gas (b) Di-atomic gas
(c) Tri-atomic gas (d) Poly-atomic gas
5. When the valve of an evacuated bottle is opened, the atmospheric air rushes into it. If the

atmospheric pressure is 101.325 kPa and 0.6 m³ of air enters into the bottle, then the work done by the air will be

- (a) 80.8 kJ (b) 70.8 kJ
(c) 60.8 kJ (d) 50.8 kJ

6. A thermodynamic cycle is composed of four processes. The heat added and the work done in each process are as follows :

| Process | Heat transfer (J) | Work done (J) |
|---------|-------------------|-----------------|
| 1–2 | 0 | 50 (by the gas) |
| 2–3 | 50 (from the gas) | 0 |
| 3–4 | 0 | 20 (on the gas) |
| 4–1 | 80 (to the gas) | 0 |

The thermal efficiency of the cycle is

- (a) 20.3% (b) 37.5%
(c) 40.3% (d) 62.5%


7. A steel tank placed in hot environment contains 5 kg of air at 4 atm at 30°C. A portion of the air is released till the pressure becomes 2 atm. Later, the temperature of the air in the tank is found to be 150°C. The quantity of air allowed to escape is
- (a) 4.72 kg (b) 4.12 kg
(c) 3.71 kg (d) 3.21 kg
8. Consider the following statements :

- Entropy is related to the first law of thermodynamics.
- The internal energy of an ideal gas is a function of temperature and pressure.
- The zeroth law of thermodynamics is the basis for measurement of temperature.

Which of the above statements are correct ?

- (a) 1 and 2 only (b) 1 and 3 only
(c) 2 and 3 only (d) 1, 2 and 3

9. A system absorbs 100 kJ as heat and does 60 kJ work along the path 1-2-3. The same system does 20 kJ work along the path 1-4-3. The heat absorbed during the path 1-4-3 is



- (a) -140 kJ (b) -80 kJ
(c) 80 kJ (d) 60 kJ

IES – 2017

10. **Statement (I):** The specific heat at constant pressure for an ideal gas is always greater than the specific heat at constant volume.

Statement (II): Heat added at constant volume is not utilized for doing any external work.

11. During a constant pressure expansion of a gas, 33.3% heat is converted into work while the temperature rises by 20 K. The specific heat of the gas at constant pressure as a proportion of work, W is
- (a) 8% (b) 10%
(c) 12% (d) 15%

IES – 2016

12. Consider the following processes :

1. Extension of a spring
2. Plastic deformation of a material
3. Magnetization of a material exhibiting hysteresis

Which of the above process are irreversible?

- (a) 1 and 2 only (b) 1 and 3 only
(c) 2 and 3 only (d) 1, 2 and 3

13. Which of the following statements are correct for a throttling process?

1. It is an adiabatic steady flow process
2. The enthalpy before and after throttling is same
3. In the processes, due to fall in pressure, the fluid velocity at outlet is always more than inlet velocity

- (a) 1 and 2 only (b) 1 and 3 only
(c) 2 and 3 only (d) 1, 2 and 3

14. **Statement (I) :** Thermometers using different thermometric property substance may give different readings except at two fixed points.

Statement (II) : Thermodynamic temperature scale is independent of any particular thermoemtric substance.

15. **Statement (I) :** First law of thermodynamics analyses the problem quantitatively whereas second law of thermodynamics analyses the problem qualitatively.

Statement (II) : Throttling process is reversible process.

16. Which one of the following statements is correct during adiabatic charging of an ideal gas into an empty cylinder from a supply main?

- (a) The specific enthalpy of the gas in the supply main is equal to the specific enthalpy of the gas in the cylinder
- (b) The specific enthalpy of the gas in the supply main is equal to the specific internal energy of the gas in the cylinder
- (c) The specific internal energy of the gas in the supply main is equal to the specific enthalpy of the gas in the cylinder
- (d) The specific internal energy of the gas in the supply main is equal to the specific internal energy of the gas in the cylinder

17. Consider the following systems :

1. An electric heater
2. A gas turbine
3. A reciprocating compressor

The steady flow energy equation can be applied to which of the above systems?

- (a) 1 and 2 only (b) 1 and 3 only
(c) 1, 2 and 3 (d) 2 and 3 only

18. Consider the following conditions for the reversibility of a cycle :

1. The P and T of the working substance must not differ appreciably, from those of the surroundings at any state in the process.
2. All the processes, taking place in the cycle, must be extremely slow.

EXPLANATIONS

Sol-1: (d)

Work done in polytropic process is given by,

$$W = \frac{P_1 V_1 - P_2 V_2}{n-1}$$

Here, $n = 1.4$ (given)Using, $P_1 = 100$ kPa, $V_1 = 0.1$ m³and $P_3 = 14.4$ kPa, $V_3 = 0.4$ m³

$$\begin{aligned} \text{So, work done, } W &= \frac{P_1 V_1 - P_3 V_3}{n-1} \\ &= \frac{100 \times 0.1 - 14.4 \times 0.4}{1.4 - 1} \end{aligned}$$

$$W = 10.6 \text{ kJ}$$

Sol-2: (d) $P_1 V_1^{1.3} = P_2 V_2^{1.3}$

$$\frac{P_1}{P_2} = \left(\frac{V_2}{V_1} \right)^{1.3}$$

$$\Rightarrow V_2 = \left(\frac{P_1}{P_2} \right)^{\frac{1}{1.3}} \times V_1$$

$$\Rightarrow V_2 = \left(\frac{15 \text{ bar}}{1.5 \text{ bar}} \right)^{\frac{1}{1.3}} \times 0.3 \text{ m}^3 = 1.7634 \text{ m}^3$$

$$Pv^{1.3} = \text{constant} = C \text{ (say)}$$

$$\Rightarrow P = \frac{C}{V^{1.3}}$$

$$\text{work done } W = \int_{V_1}^{V_2} P dv = \int_{V_1}^{V_2} \frac{C}{V^{1.3}} dV$$

$$= \int_{V_1}^{V_2} C V^{-1.3} dV = C \left[\frac{V^{-0.3}}{-0.3} \right]_{V_1}^{V_2}$$

$$= \frac{C}{-0.3} [V_2^{-0.3} - V_1^{-0.3}]$$

$$= \frac{-1}{0.3} [P_2 V_2^{1.3} \cdot V_2^{-0.3} - P_1 V_1^{1.3} \cdot V_1^{-0.3}]$$

$$= \frac{-1}{0.3} [P_2 V_2 - P_1 V_1] = \left[\frac{P_1 V_1 - P_2 V_2}{0.3} \right]$$

$$= [15 \times 10^5 \times 0.3 - 1.5 \times 10^5 \times 1.7634] / 0.3$$

$$= 618.3 \text{ kJ}$$

Sol-3: (c)


Path functions like heat transfer and work transfer can't be represented by points in the graph, but can be given by the area under the curve.

Ex: heat transfer will be area under curve in T-s diagram work transfer will be area under curve in P-V diagram.

Sol-4: (a)**Sol-5: (c)**


Work done by air

$$\begin{aligned} &= P dv \\ &= 101.325 \times 0.6 \\ &= 60.8 \text{ kJ} \end{aligned}$$

**Sol-6: (b)**

Thermal efficiency,

$$\eta = 1 - \frac{Q_2}{Q_1} = 1 - \frac{50}{80} = 37.5\%$$

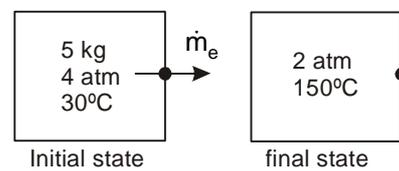Sol-7: (d)

From mass conservation,

$$\dot{m}_i - \dot{m}_e = \frac{d}{dt} m_{cv} = m_2 - m_1$$

(1) No inlet, so $\dot{m}_i = 0$

$$\therefore \dot{m}_e = m_1 - m_2 \quad \dots(i)$$

(2) $m_1 = 5$ kg (given)

$$(P_1 V = mRT_1)$$

$$\begin{aligned} m_2 &= \frac{P_2 V}{RT_2} = \frac{P_2}{RT_2} \left(\frac{m_1 RT_1}{P_1} \right) \\ &= \frac{2}{423} \times \frac{5 \times 303}{4} = 1.79 \text{ kg} \end{aligned}$$

From equation (i) $\dot{m}_e = 5 - 1.79 = 3.21$ kg**Sol-8: (*)****Sol-9: (d)**

For process 1 - 2 - 3

$$Q_{123} = U_3 - U_1 + W_{123}$$

$$U_3 - U_1 = Q_{123} - W_{123} = 100 - 60 = 40 \text{ kJ}$$

For process 1 - 4 - 3

$$Q_{143} = U_3 - U_1 + W_{143}$$

$$= 40 + 20 = 60 \text{ kJ}$$

Sol-10: (a)

The specific heat of ideal gas of constant pressure is the sum of specific heat at constant volume and a constant term. This constant term comes due to work done component. This work done component is missing when heat is added at constant volume.

Sol-11: (d)

The work done during expansion,

$$W = 0.333 Q$$

Because heat added,

$$Q = C_p \Delta T$$

Because work done,

$$W = 0.333 C_p \Delta T$$

$$\therefore \frac{C_p}{W} = \frac{1}{0.333 \times \Delta T} = \frac{1}{0.333 \times 20}$$

$$\frac{C_p}{W} = \frac{100}{0.333 \times 20} = 15\%$$

Sol-12: (c)

A process is reversible if both the system and surroundings are restored to initial condition. Thus, plastic deformation of a material and magnetization of a material exhibiting hysteresis are irreversible processes. The spring after extension will get back to its original position after removal of load, hence it can be considered as reversible.

Sol-13: (a)

Throttling process involves the passage of a higher pressure fluid through a narrow constriction. This process is adiabatic, and there is no work interaction. Hence,

$$Q = 0 \text{ \& } W = 0$$

$$\Delta PE = 0$$

(Inlet and outlet are at the same level)

$$\Delta KE = 0$$

(KE does not change significantly)

$$\therefore \text{Applying the SFEE, } h_1 = h_2$$

Thus, enthalpy remain constant

Further, the velocity of flow is kept low and any difference between the kinetic energy upstream and downstream is negligible. The effect of the decrease in pressure is an increase in volume.

Sol-14: (b)

Thermodynamic or absolute temperature scale is independent of any working substance. The fact that the efficiency of a reversible heat engine cycle depends only on the temperature of the two reservoirs makes it possible to establish such a scale. If the temperature of a given system is measured with thermometers using different thermoemetric properties, there is considerable difference among the readings.

Sol-15: (c)

Throttling process is a irreversible process as the entropy of the fluid increases during the process. The first law of thermodynamics only gives a quantitative estimate of the heat and work interaction between the system and surroundings, however, it does not state about quality of energy. It is the second law of thermodynamics which deals with the low grade and high grade energy and concepts of availability.

Sol-16: (b)

For charging the tank,

$$m_p h_p = m_2 u_2 - m_1 u_1$$

If the tank is initially empty, then $m_1 = 0$

$$\therefore m_p h_p = m_2 u_2$$

Since $m_p = m_2$, hence, $h_p = u_2$

Sol-17: (c)

The reciprocating compressor can be considered as steady flow system provided the control volume includes the receiver which reduces the fluctuation of flow.

For electric heater, at steady state

$$W = Q$$

